



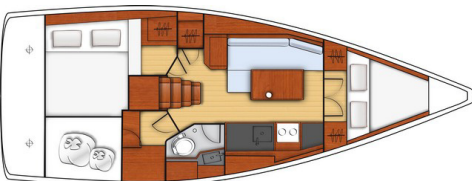

Lifting keel option cradle

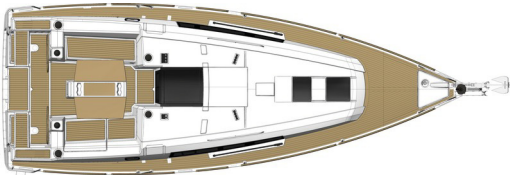

GENERAL SPECIFICATIONS

• L.O.A:		
- without bowsprit	10,45m	34'3"
- with bowsprit	10,75m	35'3"
• Hull length	9,97m	32'9"
• L.W.L.	9,70m	31'10"
• Beam	3,72m	12'2"
• Light displacement:	5 966kg	13,149 lbs
• Deep draft	1,94m	6'4"
• Deep ballast weight	1 559kg	3,436 lbs
• Shallow draft	1,56m	5'1"
• Shallow ballast weight	1 825kg	4,022 lbs
• Air draft	15,60m	51'2"
• Lifting keel version	1,23/2,39m	4'7"/10"
• Lifting keel version ballast weight	2 151kg	4,741 lbs
• Fresh water capacity:		
- standard	130L	34 US Gal
- Option	200L	53 US Gal
• Fuel capacity	130L	34 US Gal
• Engine power	30 HP	30 HP

ARCHITECTS / DESIGNERS

- Naval Architect: Finot - Conq
- Outside & interior design: Nauta Design

EC CERTIFICATION

- Category A - 6 people
- Category B - 8 people
- Category C - 10 people

STANDARD SAILS DIMENSIONS

• Mainsail	25,75m ²	277 sq ft
• Furling mainsail	22,00m ²	237 sq ft
• Genoa (106 %)	28,65m ²	308 sq ft
• Asymmetric spinnaker	78,84m ²	849 sq ft
• Code 0	47,83m ²	515 sq ft
• Self-tacking jib	20,77m ²	223 sq ft
• I	12,45m	40'10"
• J	4,29m	14'1"
• P	12,20m	40'
• E	3,90m	12'10"



STANDARD EQUIPMENT

CONSTRUCTION

- Design in accordance with European Directive requirements and according to CE certification
- Monolithic hull design in polyester
- Monolithic structural inner moulding bonded to the hull
- Injected deck construction in glass fiber and Saerform foam sandwich, covered with non-slip diamond pattern
- Hull-deck joint screwed, bonded and trimmed with 1 bulwark
- Cast iron keel fixed with bolts and stainless steel backing plates
- 2 Underhung rudders with stainless steel stock
- White coloured hull - Grey metal hull graphics

DECK EQUIPMENT

RIGGING

- Standard mast 9/10 anodized aluminum deck stepped, 2 aft-swept spreaders
- Anodised aluminum boom
- Discontinuous stainless steel standing rigging
- 1 Backstay: Bridle
- Rigid boom vang with tackle
- Genoa furling system with drum on the deck
- 2 Genoa tracks with piston adjusted traveller cars
- 2 Genoa sheet return stainless steel fairleads
- Rigging run back to cockpit (except boom topping lift)
- Complete running rigging: Mainsail halyard, genoa halyard with clutch on mast and cleat, Boom topping lift with cleat on mast, Mainsheet, 2 Genoa sheets, 2 Automatic reefing system
- 4 clutches, 4 Jamming cleats
- Mainsail sheet in cockpit bottom (1 Fixed point)
- 2 Flag halyards
- optional extra:
 - Fixed composite arch, with incorporated LED lighting (+ 2 Stand-up blocks for mainsail sheet)

WINCHES

- 2 Self-tailing genoa sheet winches (H40.2 STA)
- 1 Self tailing winch (H35.2 STA)
- 1 Aluminum "Speed Grip" winch handle, 1 Winch handle box

SAILS

- Furling genoa with UV protective strip
- Semi full batten mainsail with slider (with logo) (Roller slides for fully battened mainsail)
- Lazy Jack

MOORING LINES - MOORING

- Self-draining chain locker - Clench bolt - Hatch cover
- Single stem roller
- 4 Aluminum mooring cleats - Stainless steel chafing plate

SAFETY ON DECK

- 1 Open stainless steel pulpit, 2 Stainless steel pushpits
- 1 Lifebuoy support bracket
- Double guard lines and stainless steel stanchions
- Welded ring on pushpit for flag

COCKPIT

- Self-draining cockpit
- 1 Cockpit locker
- 2 Lockers in cockpit bottom - Side helm's seats
- 1 Liferaft locker - aft cockpit (0,95m x 0,59m x 0,36m / 3'1" x 1'11" x 1'2")
- Natural solid wood slatted cockpit benches (1,50m x 0,50m / 4'11" x 1'8")
- Table with compac top, Handrails
- 2 Steering wheel consoles: Stainless steel steering wheels - 800mm diameter / 2'7" - Leather covered - Steering gear at the helm station - metal cable transmission system - Stainless steel handrail - navigation instrument support (optional instruments) - Cup holder
- 2 Steering compass
- 2 Deck access points to tiller system
- 1 Emergency tiller
- Portside engine control and control panel
- 2 Hinged PMMA companionway doors - Sliding hatch made of PMMA
- 1 Swimming ladder

SWIM PLATFORM / AFT TRANSOM (Confort Trim level)

- Fully opening transom, convertible to bathing platform (2,60m x 0,70m / 8'6" x 2'4")
- Gas strut opening (manual), 1 Stainless steel integrated telescopic swimming ladder



INTERIOR

- Alpi walnut woodwork
- Rovere Aleve type laminated floorboards
- Beige hull liner, in saloon and forward cabin
- Fabric upholstery
- Mattresses in the cabins, HR35kg/m3 foam

COMPANIONWAY

Headroom: 1,85m / 6'1"

- GRP saloon companionway coated with non-slip surface on the steps
- 1 Leather covered stainless steel handrail

Long galley on starboard version

HANGING LOCKER - PORT

- Beam: 50 cm / 1'8"

SALOON - PORT

Headroom: 1,90m / 6'3"

- L-shaped saloon bench seat
- Storage under bench seats
- Saloon table with one-piece wood top - 2 feet
- High, closed units
- Chart table (with opening top) - Reading light
- Shelves with fiddles
- 1 Coachroof panoramic window with curtain
- 2 Hull portholes with curtain
- 1 Opening deck hatch with mosquito screen/blind
- 1 Opening porthole in coaming
- LED ceiling lights

FORWARD CABIN

Headroom: 1,80m / 5'11"

- Central double bed (1,75m x 2,00m x 0,45m / 5'9" x 6'7" x 1'6")
- 2 Hanger closets
- Drawer under the bed
- 1 Opening deck hatch with fan, mosquito screen/blind
- 2 Hull portholes with curtain
- 2 Reading lights

LENGTHWAYS GALLEY COUNTER - STARBOARD

Headroom: 1,90m / 6'3"

- Compact Clay laminated worktop
- 1 Stainless steel sink - 1 Rectangular stainless steel basin - 1 Hot/cold water mixer tap
- 1 2 hobs stainless steel gas cooker on mounting
- Unit (Drawer & Cupboards)
- Front opening refrigerator (12V - 130L / 34 US Gal)
- Cubby hole locker, Bin
- 1 Coachroof panoramic window with curtain

2-CABIN LAYOUT

Starboard aft: Interior stowage space

Headroom: 1,75m / 5'9"

- Direct access from the saloon
- Allows direct access to the cockpit locker

Port aft: 1 Cabin

Headroom: 1,75m / 5'9"

- Dimensions - Berths: 1,73m x 1,98m / 5'8" x 6'6"
- 1 Overhead light, 1 Reading light
- Open shelving
- Padding upholstery along the hull
- 1 Wood hanging locker
- Deck house opening porthole

3-CABIN LAYOUT

Headroom: 1,75m / 5'9"

- 2 Aft cabins
- Dimensions - Berths: 1,45m x 2,00m / 4'9" x 6'7"

Aft starboard head compartment

Headroom: 1,90m / 6'31"

- Access through saloon
- 1 Washbasin, 1 Mixing tap hot/cold water, Shower
- 1 Manual marine toilet with 80 L / 21 US Gal rigid reserve
- Cabinet, 1 Mirror, Toilet accessories, Peg
- 1 Overhead light
- 1 Opening portlight with curtains in the coachroof side window

L-shaped galley on port side version

Replacing the hanging locker and the chart table

- Galley with 100 L / 26 US Gal cool box instead of the 130 L / 34 US Gal fridge
- Full hull width saloon: Bench seat on port and starboard sides, Large saloon table with 2 leaves and bottle rack, Retractable chart table on starboard side



ENGINE

- Engine Yanmar Diesel 30 hp / 30 HP Sail Drive
- Engine control - Control panel in cockpit
- Engine compartment: Soundproofing foam - Ventilation: 2 Air intakes and 1 powered air expulsion
- 1 Alternator - 12V / 125 Ah
- 1 Rotomoulded diesel tank 130 L / 34 US Gal - Gauge at the chart table - 1 Deck filler
- Filters: Seawater - Diesel - Water separator
- Fixed three blades propeller
- 1 Engine access through companionway - 3 access to engine by the sides of the companionway

ELECTRICITY

- 12V circuit
- 1 Service battery (80 Ah) - 1 Engine battery (50 Ah)
- 1 Power distributor
- 12 V electrical panel
- 1 12 V Socket
- LED navigation lights: 1 Masthead light - 1 Engine navigation light - 1 Anchor light on masthead
- Wire runs for option cables

PLUMBING

- 1 rotomoulded freshwater tank (130L / 34 US Gal)
- 1 Deck filler
- Water unit
- 1 80 L / 21 US Gal rigid holding tank
- Electronic pump & Shower draining
- Water heater (25L / 7 US Gal) - engine use (220V)

GAS

- Gas cylinder locker - starboard aft cockpit (25 cm x 27 cm x 40 cm / 10" x 11" x 15")
- Regulator and safety tap
- Gas leak detector

MISCELLANEOUS ITEMS

- Smoke detector



TRIM LEVEL & PACKS

TRIM LEVEL

	CONFORT	FAMILY
<ul style="list-style-type: none"> Cockpit opening porthole for aft cabin(s) Stainless steel 2 burner oven/grill cooker on mounting (in lieu of standard) LED indirect lighting in saloon 	<ul style="list-style-type: none"> ■ ■ ■ 	
<ul style="list-style-type: none"> Solid wood slatted aft platform Solid wood slatted helmsman grid seats Mosquito screens on portholes 1 Halyard bags Hot/cold water cockpit shower HiFi: Fusion + Interior loudspeakers & Waterproof exterior speakers Full 12/230 V system (Inside sockets, 40 Amperes battery charger, Shore power socket) 2 Additional 80 ampères service batteries 	<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■ ■ ■ 	<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■ ■ ■
<ul style="list-style-type: none"> Luxe cockpit table (GRP) 1 000 W Electric windlass (Remote control) Aft transom protection Outboard engine bracket Additional freshwater tank (200L / 53 US Gal) Ventilator in the saloon and the cabins 		<ul style="list-style-type: none"> ■ ■ ■ ■ ■ ■

ELECTRONICS PACKS: B&G

	COASTAL	OFFSHORE
<ul style="list-style-type: none"> 1 Triton 2 Graphic display (Port steering console) Sensor (Log, Speedometer, Temperature) Wind Sensor B&G (Windvane, Anemometer) Windex Windvane 	<ul style="list-style-type: none"> ■ ■ ■ ■ 	<ul style="list-style-type: none"> ■ ■ ■ ■
<ul style="list-style-type: none"> 1 7" wide wireless screen - Port steering console (Triton 2 pass to starboard) Chart table: B&G V60 VHF, AIS receiver function 		<ul style="list-style-type: none"> ■ ■

PERFORMANCE PACK

(Incompatible with mainsail arch option and "Luxe" cockpit table)

Boast supplied without sail (optional extra: Performance Sails)

- Extended classic mast (+ 1m / 3'3")
- German System (Two-way mainsheet at the helm station)
- Flat deck furler
- Adjustable genoa traveller
- Mainsheet Dyneema
- Cascading backstay
- Performance hull decoration

RIGGING PACK

DOWNIND PACK

- Polyester bowsprit
- Asymmetrical spinnaker rigging / Code 0
- Second bow roller and bobstay
- Coach roof winch to starboard - manual (H35.2STA) + Clutches + Halyard bags



OPTIONS

B&G ELECTRONIC

- B&G NAC3 autopilot + Control at steering station
- AIS 500

RIGGING - SAILS

- Anodized mast furling system with Mylar - Taffetas mainsail
- GRP mainsail arch with 2 stand-up mainsheet blocks
- Self-tacking jib hardware
- Code 0 with "Top Down" furling system
- Self-tacking jib (replacing genoa)
- Performance Elvström Lite Skin Sails (Mainsail: 28m² / 301 sq/ft - Genoa: 32,50m² / 349 sq/ft)
- Backstay adjustment (Except on mast with in-mast furling)
- Genoa sheet track leads adjustable from the cockpit
- German System: Two-way mainsheet at the helm station (Except on mast with in-mast furling)
- natural colour Lazy bag

WINCHES

- Port electric primary winch (H40.2 STAEH), in lieu of standard
- Coach roof winch to starboard - manual (H35.2STA) + Clutches + Halyard bags (Incompatible with Downwind Pack)

HULL - DECK - COCKPIT

- Ballasted boat version
- Grey "Perle" hull
- Solid wood decking on cockpit sole
- "Luxe" cockpit table (Mainsail arch required)
- PVC cover - White ("Luxe" cockpit table)
- White PVC console covers
- Cockpit fixed portholes for the aft cabin(s) (incompatible with port electric winch)
- Silver Coachroof sprayhood
- Silver Cockpit Bimini
- Dolce 51 Cockpit cushions
- Tunnel bow thruster
- 3 folding blades propeller
- 1000 W Electric windlass - Remote control
- Windlass control in cockpit with chain counter (fixed)
- Shore fresh water supply
- Outboard engine bracket (Pushpit)
- Mooring kit:
 - Delta 16 kg/32 lbs anchor (galvanized steel)
 - Chain (Diameter: 10mm / 3/8" - Length: 28m / 92')
 - Line (Diameter: 18mm / 1 1/16" - Length: 40m / 131')
 - 6 Fenders - M (Diameter: 200mm / 8" - Length: 635mm / 2'1")
 - 4 Moorings lines (Diameter: 16mm / 5/8" - Length: 12m / 39'4")
- Access openings to port and starboard
- 2 Aluminum mooring cleats on the beam

INTERIOR EQUIPMENT

- Alpi white oak joinery (+ Rovere Aleve type laminated floorboards)
- Brown oak laminated floors (only with Alpi white oak woodwork)
- 1 Additional pouffe in saloon (for lengthways galley)
- Interior upholstery according to colour chart
- Upholstery padding (Saloon and Cabins): Taupe
- TV pre-assembly, in the saloon
- Microwave oven (20L)
- Slatted bed base
- Double berth in saloon + 1 Stool (for lengthways galley counter)
- Wooden companionway steps
- Separate shower (for 2 cabin layout, only)



- Quiet Flush electric toilet
- Additional freshwater tank (200L / 53 US Ga)
- Sea water foot pump

- Forced air heating fuel
- 12/230 V, 2 kVA inverter